

Brass, Multi-hole

Thread Spec : M, P G, G, NPT


Protection Class: IP68-5Bar

Working Temp : -40°C~+100°C


Material : A,C,F: brass and nickel plated,
E: PA66 (UL 94V-2), B ,D: EPDM




C. ILLIES & CO. Handelsgesellschaft mbH
Valentinskamp 18 D-20354 Hamburg / Germany
Tel. +49 (0)40 359 03-0 Fax. +49 (0)40 359 03-245

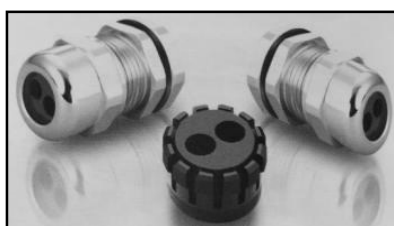


防水IP68


Qty. of Hole	Thread	Order Number	Cable Outer Diameter mm \varnothing	Thread Outer Diameter C1 mm	Thread Length C2 mm	A & F mm	Package pcs	
	M	M12 X 1.5	CMA12-H2-03	3.1 ~ 2	12	8	17 / 17	10
		M16 X 1.5	CMA16-H2-02	2.6 ~ 1.6	16	9	22 / 22	10
			CMA16-H2-03	3 ~ 2	16	9	22 / 22	10
			CMA16-H2-04	4.1 ~ 3	16	9	22 / 22	10
		M20 X 1.5	CMA20M-H2-05	5.2 ~ 3.5	20	9,5	24 / 24	10
			CMA20-H2-03	3.5 ~ 2.5	20	9,5	26 / 26	10
			CMA20-H2-04	4.3 ~ 3.3	20	9,5	26 / 26	10
			CMA20-H2-06	6.1 ~ 4.3	20	9,5	26 / 26	10
		M25 X 1.5	CMA25-H2-05	5.2 ~ 3.6	25	12	32 / 32	10
			CMA25-H2-06	6.5 ~ 5.1	25	12	32 / 32	10
			CMA25-H2-08	8.7 ~ 6.4	25	12	32 / 32	10
		M32 X 1.5	CMA32-H2-10	10 ~ 7.7	32	12,5	41 / 41	10
		M40 X 1.5	CMA40-H2-09	9 ~ 7	40	15	50 / 50	5
			CMA40-H2-13	13 ~ 11	40	15	50 / 50	5
G (PF)	1/4	G (PF) 1/4	CGA13-H2-03	3.1 ~ 2	13, 15	8	17 / 17	10
		G (PF) 3/8	CGA17-H2-02	2.6 ~ 1.6	16, 66	9	22 / 22	10
			CGA17-H2-03	3 ~ 2	16, 66	9	22 / 22	10
	1/2	CGA17-H2-04	4.1 ~ 3	16, 66	9	22 / 22	10	
		G (PF) 1/2	CGA21-H2-03	3.5 ~ 2.5	20, 95	9,5	26 / 26	10
			CGA21-H2-04	4.3 ~ 3.3	20, 95	9,5	26 / 26	10
			CGA21-H2-06	6.1 ~ 4.3	20, 95	9,5	26 / 26	10
	3/4	CGA26-H2-05	5.2 ~ 3.6	26, 44	12	32 / 32	10	
		G (PF) 3/4	CGA26-H2-06	6.5 ~ 5.1	26, 44	12	32 / 32	10
			CGA26-H2-08	8.7 ~ 6.4	26, 44	12	32 / 32	10

2		G (PF) 1	CGA33-H2-10	10 ~ 7.7	33, 25	12, 5	41 / 41	10
		G (PF) 1 1/4	CGA42-H2-09	9 ~ 7	41, 91	15	50 / 50	5
			CGA42-H2-13	13 ~ 11	41, 91	15	50 / 50	5
	PG	PG 7	CPA7-H2-03	3.1 ~ 2	12, 5	8	17 / 17	10
		PG 9	CPA9-H2-03	3.1 ~ 2	15, 2	8	18 / 17	10
		PG 11	CPA11-H2-02	2.6 ~ 1.6	18, 6	9	22 / 22	10
			CPA11-H2-03	3 ~ 2	18, 6	9	22 / 22	10
		PG 13.5	CPA11-H2-04	4.1 ~ 3	18, 6	9	22 / 22	10
			CPA13.5-H2-05	5.2 ~ 3.5	20, 4	9, 5	24 / 24	10
		PG 16	CPA16-H2-03	3.5 ~ 2.5	22, 5	9, 5	26 / 26	10
			CPA16-H2-04	4.3 ~ 3.3	22, 5	9, 5	26 / 26	10
			CPA16-H2-06	6.1 ~ 4.3	22, 5	9, 5	26 / 26	10
		PG 21	CPA21-H2-05	5.2 ~ 3.6	28, 3	12	32 / 32	10
			CPA21-H2-06	6.5 ~ 5.1	28, 3	12	32 / 32	10
			CPA21-H2-08	8.7 ~ 6.4	28, 3	12	32 / 32	10
	PG 29	CPA29-H2-10	10 ~ 7.7	37	12, 5	41 / 41	10	
	PG 36	CPA36-H2-09	9 ~ 7	47	15	50 / 50	5	
		CPA36-H2-13	13 ~ 11	47	15	50 / 50	5	
	NPT	NPT 3/8	CNA17-H2-02	2.6 ~ 1.6	17, 05	13	22	10
			CNA17-H2-03	3 ~ 2	17, 05	13	22	10
CNA17-H2-04			4.1 ~ 3	17, 05	13	22	10	
NPT 1/2		CNA21-H2-03	3.5 ~ 2.5	21, 22	13	26	10	
		CNA21-H2-04	4.3 ~ 3.3	21, 22	13	26	10	
		CNA21-H2-06	6.1 ~ 4.3	21, 22	13	26	10	
NPT 3/4		CNA26-H2-05	5.2 ~ 3.6	26, 56	14	32	10	
		CNA26-H2-06	6.5 ~ 5.1	26, 56	14	32	10	
		CNA26-H2-08	8.7 ~ 6.4	26, 56	14	32	10	
NPT 1		CNA33-H2-10	10 ~ 7.7	33, 22	15	41	10	
NPT 1 1/4		CNA42-H2-09	9 ~ 7	41, 98	15	50	5	
		CNA42-H2-13	13 ~ 11	41, 98	15	50	5	


夹紧圈形状 3孔	螺牙规格	订货号	电缆外径 mm	螺纹外径 C1 mm	螺纹长度 C2 mm	扳手径 A & F mm	包装 pcs	
	M	M12 X 1.5	CMA12-H3-02	2.6 ~ 1.6	12	8	17 / 17	10
		M16 X 1.5	CMA16-H3-03	3 ~ 2	16	9	22 / 22	10
			CMA16-H3-04	4.2 ~ 3	16	9	22 / 22	10
		M20 X 1.5	CMA20M-H3-05	5 ~ 3.5	20	9,5	24 / 24	10
			CMA20-H3-03	3.6 ~ 2.6	20	9,5	26 / 26	10
		M25 X 1.5	CMA20-H3-05	5.2 ~ 3.5	20	9,5	26 / 26	10
			CMA25-H3-05	5.2 ~ 3.6	25	12	32 / 32	10
		M32 X 1.5	CMA25-H3-06	6.2 ~ 4.8	25	12	32 / 32	10
	CMA25-H3-08		8 ~ 6.2	25	12	32 / 32	10	
	M40 X 1.5	CMA32-H3-10	10 ~ 7.7	32	12,5	41 / 41	10	
		CMA40-H3-08	8.3 ~ 6.5	40	15	50 / 50	5	
	M40 X 1.5	CMA40-H3-10	10 ~ 7.7	40	15	50 / 50	5	
		G(PF)	G(PF) 1/4	CGA13-H3-02	2.6 ~ 1.6	13, 15	8	17 / 17
	G(PF) 3/8		CGA17-H3-03	3 ~ 2	16, 66	9	22 / 22	10
			CGA17-H3-04	4.2 ~ 3	16, 66	9	22 / 22	10
	G(PF) 1/2		CGA21-H3-03	3.6 ~ 2.6	20, 95	9,5	26 / 26	10
			CGA21-H3-05	5.2 ~ 3.5	20, 95	9,5	26 / 26	10
	G(PF) 3/4		CGA26-H3-05	5.2 ~ 3.6	26, 44	12	32 / 32	10
			CGA26-H3-06	6.2 ~ 4.8	26, 44	12	32 / 32	10
	CGA26-H3-08	8 ~ 6.2	26, 44	12	32 / 32	10		
	G(PF) 1	CGA33-H3-10	10 ~ 7.7	33, 24	12, 5	41 / 41	10	
	G(PF) 1 1/4	CGA42-H3-08	8.3 ~ 6.5	41, 91	15	50 / 50	5	
		CGA42-H3-10	10 ~ 7.7	41, 91	15	50 / 50	5	
	PG	PG 7	CPA7-H3-02	2.6 ~ 1.6	12, 5	8	17 / 17	10
		PG 9	CPA9-H3-02	2.6 ~ 1.6	15, 2	8	18 / 17	10
		PG 11	CPA11-H3-03	3 ~ 2	18, 6	9	22 / 22	10
			CPA11-H3-04	4.2 ~ 3	18, 6	9	22 / 22	10
		PG 13.5	CPA13.5-H3-05	5 ~ 3.5	20, 4	9,5	24 / 24	10
			CPA16-H3-03	3.6 ~ 2.6	22, 5	9,5	26 / 26	10
		PG 16	CPA16-H3-05	5.2 ~ 3.5	22, 5	9,5	26 / 26	10
CPA21-H3-05			5.2 ~ 3.6	28, 3	12	32 / 32	10	
PG 21		CPA21-H3-06	6.2 ~ 4.8	28, 3	12	32 / 32	10	
		CPA21-H3-08	8 ~ 6.2	28, 3	12	32 / 32	10	
PG 29	CPA29-H3-10	10 ~ 7.7	37	12, 5	41 / 41	10		
PG 36	CPA36-H3-08	8.3 ~ 6.5	47	15	50 / 50	5		
	CPA36-H3-10	10 ~ 7.7	47	15	50 / 50	5		
NPT	NPT 3/8	CNA17-H3-03	3 ~ 2	17, 05	13	22	10	
		CNA17-H3-04	4.2 ~ 3	17, 05	13	22	10	
	NPT 1/2	CNA21-H3-03	3.6 ~ 2.6	21, 22	13	26	10	
		CNA21-H3-05	5.2 ~ 3.5	21, 22	13	26	10	
	NPT 3/4	CNA26-H3-05	5.2 ~ 3.6	26, 56	14	32	10	
		CNA26-H3-06	6.2 ~ 4.8	26, 56	14	32	10	
	CGA26-H3-08	8 ~ 6.2	26, 56	14	32	10		
NPT 1	CNA33-H3-10	10 ~ 7.7	33, 22	15	41	10		
NPT 1 1/4	CNA42-H3-08	8.3 ~ 6.5	41, 98	15	50	5		
	CNA42-H3-10	10 ~ 7.7	41, 98	15	50	5		

夹紧圈形状 4孔	螺牙规格	订货号	电缆外径 mm \varnothing	螺纹外径 C1 mm	螺纹长度 C2 mm	扳手径 A & F mm	包装 pcs	
	M	M12 X 1.5	CMA12-H4-02	2.3 ~ 1.3	12	8	17 / 17	10
		M16 X 1.5	CMA16-H4-02	2.4 ~ 1.4	16	9	22 / 22	10
			CMA16-H4-03	3.4 ~ 2.4	16	9	22 / 22	10
		M20 X 1.5	CMA20M-H4-04	4.2 ~ 3	20	9,5	24 / 24	10
			CMA20-H4-02	2.5 ~ 1.6	20	9,5	26 / 26	10
			CMA20-H4-03	3.6 ~ 2.6	20	9,5	26 / 26	10
		M25 X 1.5	CMA20-H4-04	4.8 ~ 3.4	20	9,5	26 / 26	10
			CMA25-H4-03	3.1 ~ 2	25	12	32 / 32	10
			CMA25-H4-04	4.1 ~ 3	25	12	32 / 32	10
			CMA25-H4-05	5.2 ~ 3.8	25	12	32 / 32	10
	M32 X 1.5	CMA25-H4-07	7.3 ~ 5.6	25	12	32 / 32	10	
		CMA32-H4-09	9 ~ 7	32	12,5	41 / 41	10	
		M40 X 1.5	CMA40-H4-12	12 ~ 10	40	15	50 / 50	5
	G (PF)	G (PF) 1/4	CGA13-H4-02	2.3 ~ 1.3	13, 16	8	17 / 17	10
		G (PF) 3/8	CGA17-H4-02	2.4 ~ 1.4	16, 66	9	22 / 22	10
			CGA17-H4-03	3.4 ~ 2.4	16, 66	9	22 / 22	10
		G (PF) 1/2	CGA21-H4-02	2.5 ~ 1.6	20, 95	9,5	26 / 26	10
			CGA21-H4-03	3.6 ~ 2.6	20, 95	9,5	26 / 26	10
			CGA21-H4-04	4.8 ~ 3.4	20, 95	9,5	26 / 26	10
		G (PF) 3/4	CGA26-H4-03	3.1 ~ 2	26, 44	12	32 / 32	10
			CGA26-H4-04	4.1 ~ 3	26, 44	12	32 / 32	10
			CGA26-H4-05	5.2 ~ 3.8	26, 44	12	32 / 32	10
			CGA26-H4-07	7.3 ~ 5.6	26, 44	12	32 / 32	10
	G (PF) 1	CGA33-H4-09	9 ~ 7	33, 25	12, 5	41 / 41	10	
	G (PF) 1 1/4	CGA42-H4-12	12 ~ 10	41, 91	15	50 / 50	5	
	PG	PG 7	CPA7-H4-02	2.3 ~ 1.3	12, 5	8	17 / 17	10
		PG 9	CPA9-H4-02	2.3 ~ 1.3	15, 2	8	18 / 17	10
		PG 11	CPA11-H4-02	2.4 ~ 1.4	18, 6	9	22 / 22	10
			CPA11-H4-03	3.4 ~ 2.4	18, 6	9	22 / 22	10
		PG 13.5	CPA13.5-H4-04	4.2 ~ 3	20, 4	9,5	24 / 24	10
		PG 16	CPA16-H4-02	2.5 ~ 1.6	22, 5	9,5	26 / 26	10
			CPA16-H4-03	3.6 ~ 2.6	22, 5	9,5	26 / 26	10
			CPA16-H4-04	4.8 ~ 3.4	22, 5	9,5	26 / 26	10
		PG 21	CPA21-H4-03	3.1 ~ 2	28, 3	12	32 / 32	10
			CPA21-H4-04	4.1 ~ 3	28, 3	12	32 / 32	10
			CPA21-H4-05	5.2 ~ 3.8	28, 3	12	32 / 32	10
			CPA21-H4-07	7.3 ~ 5.6	28, 3	12	32 / 32	10
	PG 29	CPA29-H4-09	9 ~ 7	37	12, 5	41 / 41	10	
	PG 36	CPA36-H4-12	12 ~ 10	47	15	50 / 50	5	
		NPT 3/8	CNA17-H4-02	2.4 ~ 1.4	17, 05	13	22	10
			CNA17-H4-03	3.4 ~ 2.4	17, 05	13	22	10
			CNA21-H4-02	2.5 ~ 1.6	21, 22	13	26	10

NPT	NPT 1/2	CNA21-H4-03	3.6 ~ 2.6	21, 22	13	26	10
		CNA21-H4-04	4.8 ~ 3.4	21, 22	13	26	10
	NPT 3/4	CNA26-H4-03	3.1 ~ 2	26, 56	14	32	10
		CNA26-H4-04	4.1 ~ 3	26, 56	14	32	10
		CNA26-H4-05	5.2 ~ 3.8	26, 56	14	32	10
		CNA26-H4-07	7.3 ~ 5.6	26, 56	14	32	10
	NPT 1	CNA33-H4-09	9 ~ 7	33, 22	15	41	10
	NPT 1 1/4	CNA42-H4-12	12 ~ 10	41, 98	15	50	5

夹紧圈形状 5孔	螺牙规格	订货号	电缆外径 mm \varnothing	螺纹外径 C1 mm	螺纹长度 C2 mm	扳手径 A & F mm	包装 pcs	
	M	M16 X 1.5	CMA16-H5-02	2.8 ~ 2	16	9	22 / 22	10
			CMA20-H5-02	2 ~ 1.3	20	9, 5	26 / 26	10
		M20 X 1.5	CMA20-H5-03	3.1 ~ 3	20	9, 5	26 / 26	10
			CMA20-H5-04	4.1 ~ 3	20	9, 5	26 / 26	10
		M25 X 1.5	CMA25-H5-03	3.6 ~ 2.6	25	12	32 / 32	10
			CMA25-H5-04	4.6 ~ 3.6	25	12	32 / 32	10
			CMA25-H5-06	6 ~ 4.6	25	12	32 / 32	10
	M32 X 1.5	CMA32-H5-08	8 ~ 6	32	12, 5	41 / 41	10	
	M40 X 1.5	CMA40-H5-08	8.3 ~ 6.5	40	15	50 / 50	5	
	G (PF)	G (PF) 3/8	CGA17-H5-02	2.8 ~ 2	16, 66	9	22 / 22	10
			CGA21-H5-02	2 ~ 1.3	20, 95	9, 5	26 / 26	10
		G (PF) 1/2	CGA21-H5-03	3.1 ~ 3	20, 95	9, 5	26 / 26	10
			CGA21-H5-04	4.1 ~ 3	20, 95	9, 5	26 / 26	10
		G (PF) 3/4	CGA26-H5-03	3.6 ~ 2.6	26, 44	12	32 / 32	10
			CGA26-H5-04	4.6 ~ 3.6	26, 44	12	32 / 32	10
			CGA26-H5-06	6 ~ 4.6	26, 44	12	32 / 32	10
	G (PF) 1	CGA33-H5-08	8 ~ 6	33, 25	12, 5	41 / 41	10	
	G (PF) 1 1/4	CGA42-H5-08	8.3 ~ 6.5	41, 91	15	50 / 50	5	
	PG	PG 11	CPA11-H5-02	2.8 ~ 2	18, 6	9	22 / 22	10
		PG 16	CPA16-H5-02	2 ~ 1.3	22, 5	9, 5	26 / 26	10
			CPA16-H5-03	3.1 ~ 2	22, 5	9, 5	26 / 26	10
		PG 21	CPA16-H5-04	4.1 ~ 3	22, 5	9, 5	26 / 26	10
			CPA21-H5-03	3.6 ~ 2.6	28, 3	12	32 / 32	10
			CPA21-H5-04	4.6 ~ 3.6	28, 3	12	32 / 32	10
		CPA21-H5-06	6 ~ 4.6	28, 3	12	32 / 32	10	
	PG 29	CPA29-H5-08	8 ~ 6	37	12, 5	41 / 41	10	
	PG 36	CPA36-H5-08	8.3 ~ 6.5	47	15	50 / 50	5	
	NPT	NPT 3/8	CNA17-H5-02	2.8 ~ 2	17, 05	13	22	10
CNA21-H5-02			2 ~ 1.3	21, 22	13	26	10	
NPT 1/2		CNA21-H5-03	3.1 ~ 3	21, 22	13	26	10	
		CNA21-H5-04	4.1 ~ 3	21, 22	13	26	10	
NPT 3/4		CNA26-H5-03	3.6 ~ 2.6	26, 56	14	32	10	
		CNA26-H5-04	4.6 ~ 3.6	26, 56	14	32	10	
		CNA26-H5-06	6 ~ 4.6	26, 56	14	32	10	
NPT 1	CNA33-H5-08	8 ~ 6	33, 22	15	41	10		
NPT 1 1/4	CNA42-H- 08	8.3 ~ 6.5	41, 98	15	50	5		

夹紧圈形状 6孔	螺牙规格	订货号	电缆外径 mm \varnothing	螺纹外径 C1 mm	螺纹长度 C2 mm	扳手径 A & F mm	包装 pcs	
	M	M16 X 1.5	CMA16-H6-02	2.1 ~ 1.4	16	9	22 / 22	10
		M20 X 1.5	CMA20-H6-02	2 ~ 1.3	20	9,5	26 / 26	10
			CMA20-H6-03	3 ~ 2	20	9,5	26 / 26	10
		M25 X 1.5	CMA25-H6-03	3.6 ~ 2.6	25	12	32 / 32	10
			CMA25-H6-05	5.2 ~ 3.6	25	12	32 / 32	10
	M32 X 1.5	CMA32-H6-07	7 ~ 5.6	32	12,5	41 / 41	10	
	G (PF)	G (PF) 3/8	CGA17-H6-02	2.1 ~ 1.4	16,66	9	22 / 22	10
		G (PF) 1/2	CGA21-H6-02	2 ~ 1.3	20,95	9,5	26 / 26	10
			CGA21-H6-03	3 ~ 2	20,95	9,5	26 / 26	10
		G (PF) 3/4	CGA26-H6-03	3.6 ~ 2.6	26,44	12	32 / 32	10
			CGA26-H6-05	5.2 ~ 3.6	26,44	12	32 / 32	10
	G (PF) 1	CGA33-H6-07	7 ~ 5.6	33,24	12,5	41 / 41	10	
	PG	PG 11	CPA11-H6-02	2.1 ~ 1.4	18,6	9	22 / 22	10
		PG 16	CPA16-H6-02	2 ~ 1.3	22,5	9,5	26 / 26	10
			CPA16-H6-03	3 ~ 2	22,5	9,5	26 / 26	10
		PG 21	CPA21-H6-03	3.6 ~ 2.6	28,3	12	32 / 32	10
			CPA21-H6-05	5.2 ~ 3.6	28,3	12	32 / 32	10
	PG 29	CPA29-H6-07	7 ~ 5.6	37	12,5	41 / 41	10	
	NPT	NPT 3/8	CNA17-H6-02	2.1 ~ 1.4	17,05	13	22	10
		NPT 1/2	CNA21-H6-02	2 ~ 1.3	21,22	13	26	10
CNA21-H6-03			3 ~ 2	21,22	13	26	10	
NPT 3/4		CNA26-H6-03	3.6 ~ 2.6	26,57	14	32	10	
		CNA26-H6-05	5.2 ~ 3.6	26,57	14	32	10	
NPT 1	CNA33-H6-07	7 ~ 5.6	33,22	15	41	10		

夹紧圈形状 7孔	螺牙规格	订货号	电缆外径 mm \varnothing	螺纹外径 C1 mm	螺纹长度 C2 mm	扳手径 A & F mm	包装 pcs	
	M	M20 X 1.5	CMA20-H7-02	2 ~ 1.3	20	9,5	26 / 26	10
			CMA20-H7-03	3 ~ 2	20	9,5	26 / 26	10
		M25 X 1.5	CMA25-H7-03	3.6 ~ 2.6	25	12	32 / 32	10
			M32 X 1.5	CMA32-H7-06	6 ~ 4.6	32	12,5	41 / 41
	G (PF)	G (PF) 1/2	CGA21-H7-02	2 ~ 1.3	20,95	9,5	26 / 26	10
			CGA21-H7-03	3 ~ 2	20,95	9,5	26 / 26	10
		G (PF) 3/4	CGA26-H7-03	3.6 ~ 2.6	26,44	12	32 / 32	10
			G (PF) 1	CGA33-H7-06	6 ~ 4.6	33,24	12,5	41 / 41
	PG	PG 16	CPA16-H7-02	2 ~ 1.3	22,5	9,5	26 / 26	10
			CPA16-H7-03	3 ~ 2	22,5	9,5	26 / 26	10
		PG 21	CPA21-H7-03	3.6 ~ 2.6	28,3	12	32 / 32	10
			PG 29	CPA29-H7-06	6 ~ 4.6	37	12,5	41 / 41
	NPT	NPT 1/2	CNA21-H7-02	2 ~ 1.3	21,22	13	26	10
CNA21-H7-03			3 ~ 2	21,22	13	26	10	

	NPT 1	NPT 3/4	CNA26-H7-03	3.6 ~ 2.6	26, 56	14	32	10
		NPT 1	CNA33-H7-06	6 ~ 4.6	33, 22	15	41	10

夹紧圈形状 8孔	螺牙规格		订货号	电缆外径 mm \varnothing	螺纹外径 C1 mm	螺纹长度 C2 mm	扳手径 A & F mm	包装 pcs
	M	M20 X 1.5	CMA20-H8-01	1.5 ~ 1	20	9, 5	26 / 26	10
			CMA20-H8-02	2.8 ~ 2	20	9, 5	26 / 26	10
		M25 X 1.5	CMA25-H8-03	3.6 ~ 2.6	25	12	32 / 32	10
			CMA25-H8-04	4.1 ~ 3	25	12	32 / 32	10
			CMA25-H8-05	5.1 ~ 4.5	25	12	32 / 32	10
	M32 X 1.5	CMA32-H8-05	5.1 ~ 4	32	12, 5	41 / 41	10	
	G (PF)	G (PF) 1/2	CGA21-H8-01	1.5 ~ 1	20, 95	9, 5	26 / 26	10
			CGA21-H8-02	2.8 ~ 2	20, 95	9, 5	26 / 26	10
		G (PF) 3/4	CGA26-H8-03	3.6 ~ 2.6	26, 44	12	32 / 32	10
			CGA26-H8-04	4.1 ~ 3	26, 44	12	32 / 32	10
			CGA26-H8-05	5.1 ~ 4.5	26, 44	12	32 / 32	10
	G (PF) 1	CGA33-H8-05	5.1 ~ 4	33, 24	12, 5	41 / 41	10	
	PG	PG 16	CPA16-H8-01	1.5 ~ 1	22, 5	9, 5	26 / 26	10
			CPA16-H8-02	2.8 ~ 2	22, 5	9, 5	26 / 26	10
		PG 21	CPA21-H8-03	3.6 ~ 2.6	28, 3	12	32 / 32	10
			CPA21-H8-04	4.1 ~ 3	28, 3	12	32 / 32	10
			CPA21-H8-05	5.1 ~ 4.5	28, 3	12	32 / 32	10
	PG 29	CPA29-H8-05	5.1 ~ 4	37	12, 5	41 / 41	10	
	NPT	NPT 1/2	CNA21-H8-01	1.5 ~ 1	21, 22	13	26	10
			CNA21-H8-02	2.8 ~ 2	21, 22	13	26	10
NPT 3/4		CNA26-H8-03	3.6 ~ 2.6	26, 56	14	32	10	
		CNA26-H8-04	4.1 ~ 3	26, 56	14	32	10	
		CNA26-H8-05	5.1 ~ 4.5	26, 56	14	32	10	
NPT 1	CNA33-H8-05	5.1 ~ 4	33, 22	15	41	10		

